


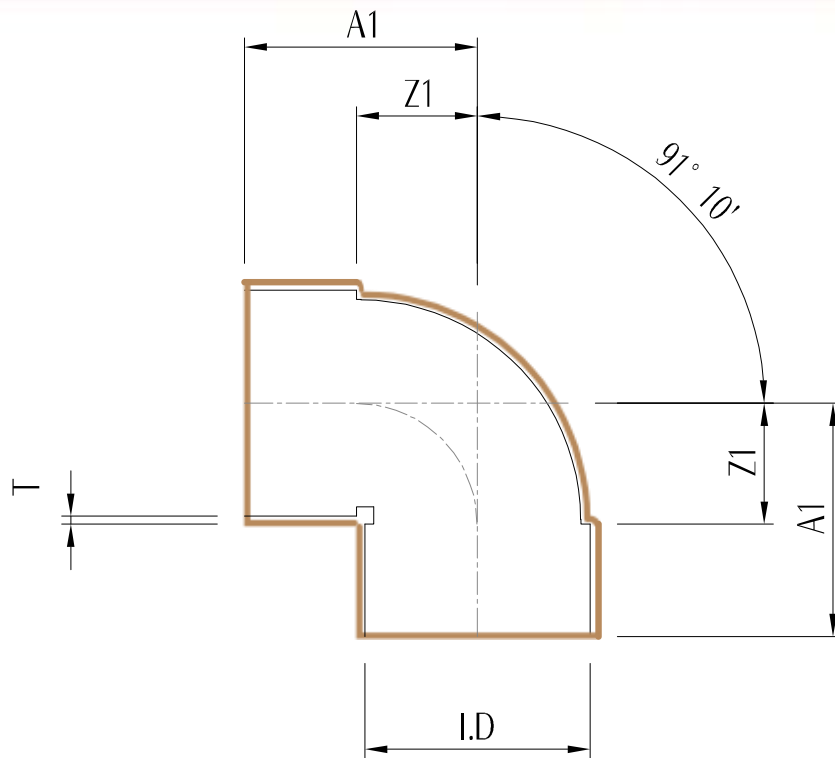

Nominal size	I.D (Ø)		A1 Length	Z1		T Thickness
	Standard	Allowable error		Length	Allowable error	
25A	32.5	±0.25	58.3	19.3	±0.2	4.5
30A	38.25	±0.25	65.0	22	±0.2	4
40A	48.3	±0.3	83.0	27	±0.2	4.5
50A	60.35	±0.3	70.5	33	±0.2	3.5
65A	76.4	±0.3	78.8	42	±0.2	3.5
75A	89.45	±0.3	93.3	48	±0.2	3.5
100A	114.55	±0.35	112	62	±0.2	4.5
125A	140.70	±0.4	140	75	±0.2	6.0
150A	165.85	±0.45	168	88	±0.2	6.0
200A	216.5	±0.7	237.5	118	±0.2	8.0
250A	267.5	±0.9	272.3	135.3	±0.2	10.0

- Unit: mm , Allowable error : KS M3410 application
- The allowable range of flow angle 91° 10' is ±30
- Thickness must be greater than the minimum dimension: KS M3410 applicable
- 300 size Miter Elbow Type