


ELBOWS 45°

HOOK UP FITTINGS

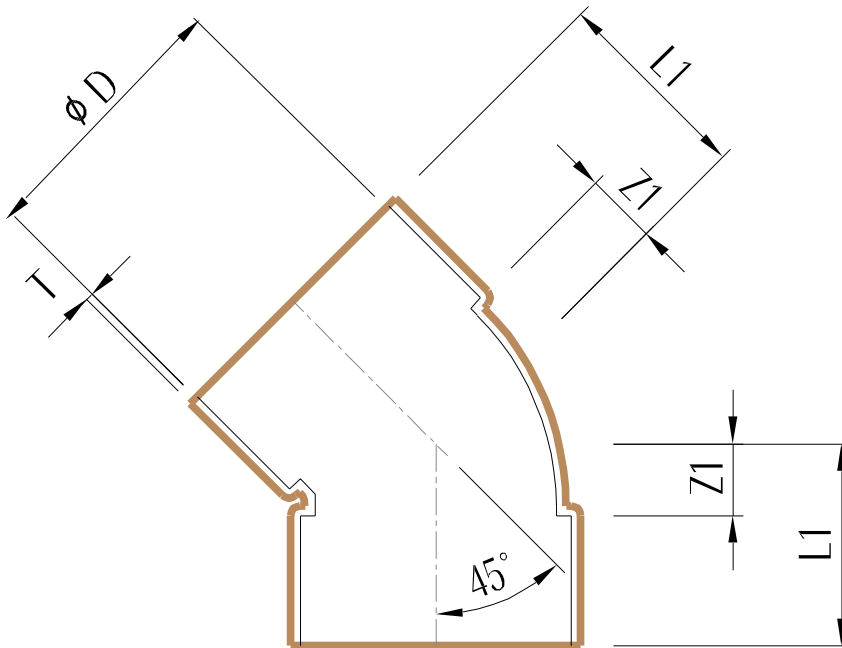

A	I.D (Ø)		L1	Z1		T
Nominal size	Standard	Allowable error	Length	Length	Allowable error	Thickness
50A	60.35	±0.3	54.5	18	±0.2	3.5
65A	76.4	±0.3	57	20.5	±0.2	3.5
75A	89.45	±0.3	65	24	±0.2	3.5
100A	114.55	±0.35	80	30	±0.2	4.5
125A	140.70	±0.4	103	38	±0.2	6.0
150A	165.85	±0.45	124	44	±0.2	6.0
200A	216.5	±0.7	172	58	±0.2	8.0
250A	267.5	±0.9	204	74	±0.2	10.0

- Unit: mm
- Allowable error : KS M3410 application
- 300 size Miter Elbow Type
- Thickness must be greater than the minimum dimension: KS M3410 applicable