


SOCKET

HOOK UP FITTINGS

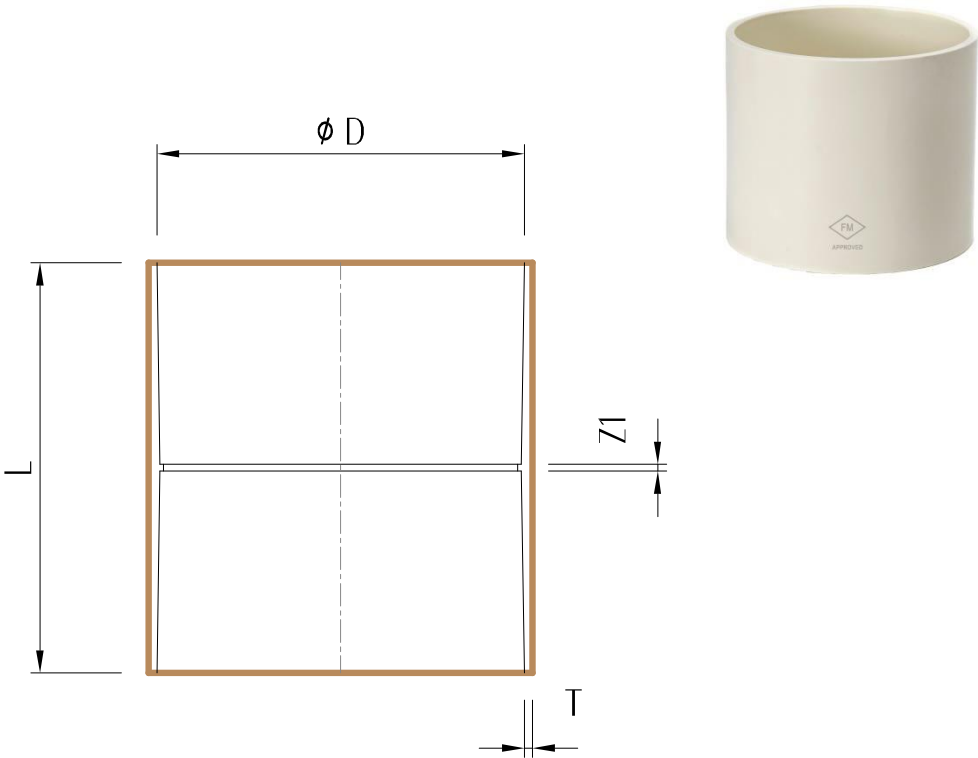

Nominal size	ϕD (I.D)		L Length	Z1		T Thickness
	Standard	Allowable error		Length	Allowable error	
25A	32.5	± 0.25	84	2	± 0.2	3.5
40A	48.3	± 0.3	117	6	± 0.2	4.0
50A	60.35	± 0.3	73	3	± 0.2	3.5
65A	76.4	± 0.3	73	3	± 0.2	4.0
75A	89.45	± 0.3	84	4	± 0.2	4.5
100A	114.55	± 0.35	104	4	± 0.2	4.5
125A	140.70	± 0.4	134	4	± 0.2	6.0
150A	165.85	± 0.45	164	4	± 0.2	6.0
200A	216.5	± 0.7	213	4	± 0.2	7.0
250A	267.5	± 0.9	280	7	± 0.2	8.0

- Unit: mm
- Allowable error : KS M3410 application
- Thickness must be greater than the minimum dimension: KS M3410 applicable