


REDUCER

HOOK UP FITTINGS

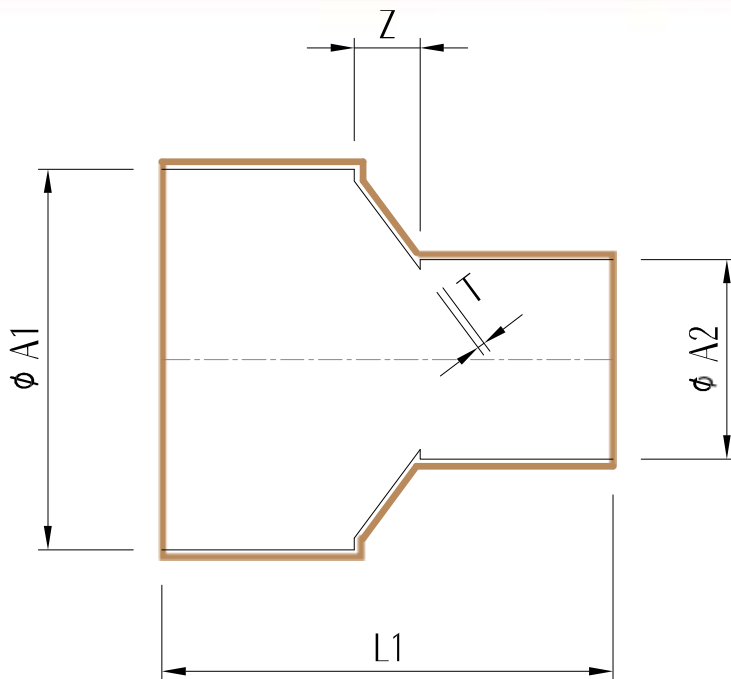

Nominal size	$\phi A1$ (ID)	$\phi A2$ (ID)	L1	Z		T
	Standard	Standard	Length	Length	Allowable error	Thickness
50A*25A	60.35	32.5	135	26	± 0.2	4.5
50A*30A	60.35	38.25	140	30	± 0.2	5.0
65A*50A	76.40	60.35	80	18	± 0.2	4.0
75A*50A	89.45	60.35	90	13	± 0.2	3.5
75A*65A	89.45	76.40	100	23	± 0.2	4.0
100A*50A	114.55	60.35	115	30	± 0.2	5.0
100A*65A	114.55	76.40	115	30	± 0.2	5.0
100A*75A	114.55	89.45	120	30	± 0.2	5.0
125A*100A	140.70	114.55	148	35	± 0.2	5.0
150A*100A	165.85	114.55	172	40	± 0.2	6.0
150A*125A	165.85	140.70	185	40	± 0.2	6.0
200A*150A	216.5	165.85	237	53	± 0.2	7.0

*custom order

- Unit: mm
- Allowable error : KS M3410 application
- Thickness must be greater than the minimum dimension: KS M3410 applicable