


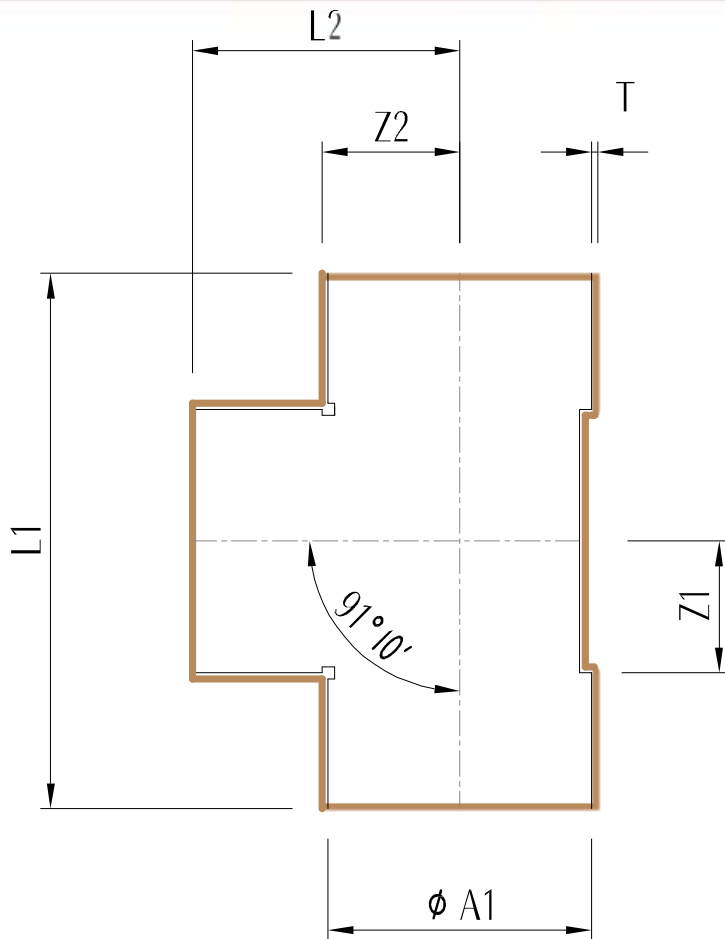

Nominal size	Ø A1(I.D)	L1	L2	Z1		Z2		T
	Standard	Length	Length	Length	Allowable error	Length	Allowable error	Thickness
50A	60.35	140	75	34	±0.2	34	±0.2	4.0
65A	76.4	155	77	42	±0.2	42	±0.2	4.0
75A	89.45	177	88	48	±0.2	49	±0.2	5.0
100A	114.55	225	112	62	±0.2	62	±0.2	5.0
125A	140.70	281	140	75	±0.2	77	±0.2	6.0
150A	165.85	340	169	89	±0.2	89	±0.2	6.0
200A	216.5	473	235	120	±0.2	117	±0.2	8.0
250A	267.5	544	281	141	±0.2	143	±0.2	9.0

- Unit: mm
- Allowable error : KS M3410 application
- Thickness must be greater than the minimum dimension: KS M3410 applicable