


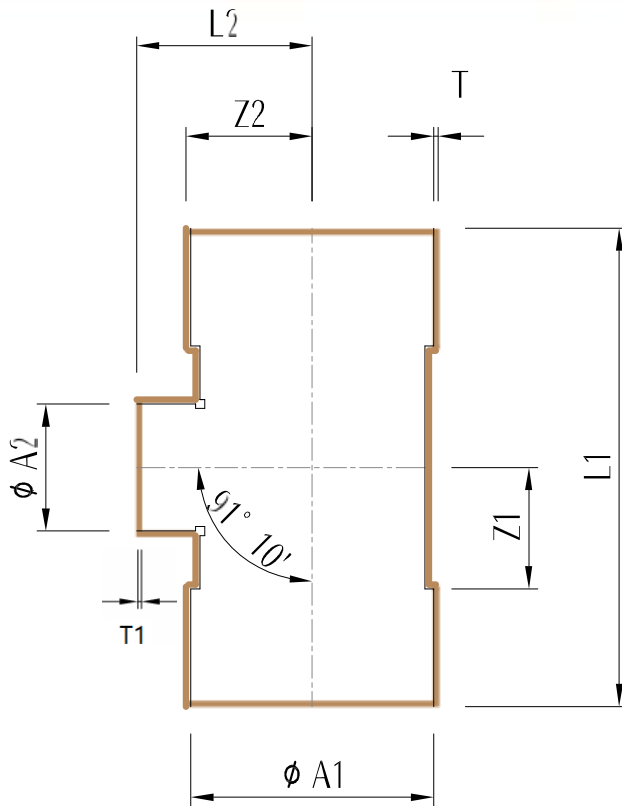

Nominal size	Ø A1(ID)	Ø A2(ID)	L1	L2	Z1		Z2 (O.D)		T	T1
	Standard	Standard	Length	Length	Length	Allowable error	Length	Allowable error	Thickness	Thickness
75A*50A	89.45	60.35	149	73	34	±0.2	48	±0.2	4.0	3.5
100A*50A	114.55	60.35	169	87	34	±0.2	62	±0.2	5.0	4.0
100A*75A	114.55	89.45	197	102	48	±0.2	62	±0.2	5.0	4.0
125A*100A	140.70	114.55	252	130	61	±0.2	77	±0.2	5.0	5.0
150A*100A	165.85	114.55	338	162	61	±0.2	88	±0.2	6.0	6.0

*custom order

- Unit: mm , Allowable error : KS M3410 application
- For sizes other than the above, please inquire in advance (made to order)
- Thickness must be greater than the minimum dimension: KS M3410 applicable