


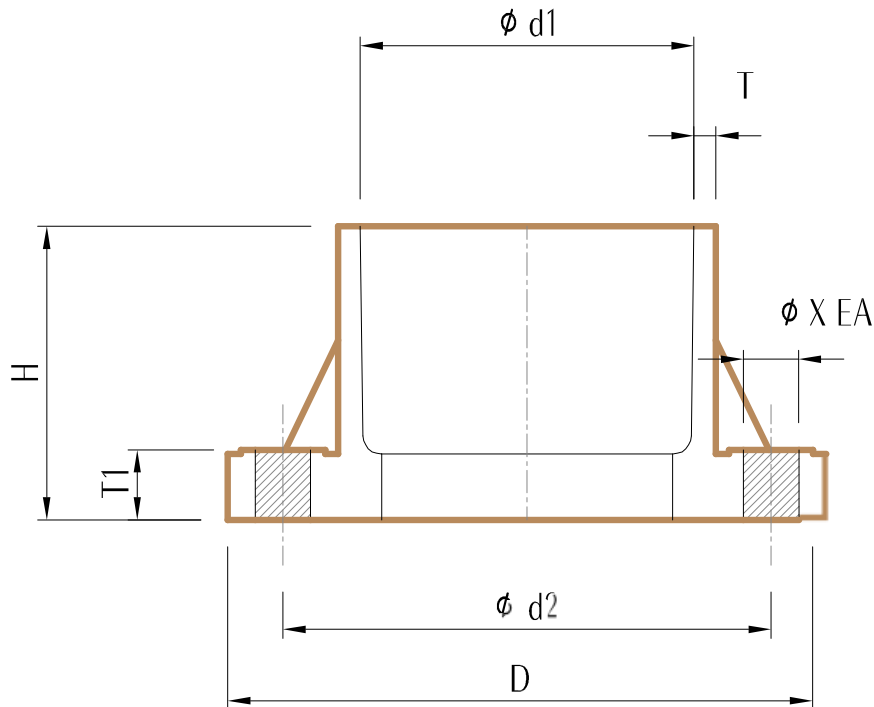

Nominal size	Ø d1(I.D)		Ø d2	D	H		T1		Φ*EA	T
	Standard	Allowable error	Standard	Length	Length	Allowable error	Thickness	Allowable error		Thickness
40A	48.3	±0.3	95	141	60	±5	20.0	±1.5	19 X 4	5.5
50A	60.35	±0.3	120	157	71	±5	20.0	±1.5	19 X 4	7.0
75A	89.45	±0.3	150	185	79	±5	20.0	±1.5	19 X 8	7.5
100A	114.55	±0.35	175	208	100	±5	22.0	±1.5	19 X 8	8.0
125A	140.70	±0.4	210	247	110	±5	24.0	±1.5	23 X 8	8.5
150A	165.85	±0.45	240	277	160	±5	28.0	±1.5	23 X 8	10.0
200A	217.3	±0.70	290	328	147	±5	28.0	±1.5	23 X 12	12.0
250A	269.5	±0.90	355	400	160	±5	28.0	±1.5	23 X 12	12.5
300A	319.5	±1.0	399	444	160	±5	30.0	±1.5	23 X 12	14.0

- Unit: mm , Allowable error : KS M3410 application
- 10k standard Thickness (T) has no KS standard: produced according to the supplier (Hyojin)'s own standards.
- Thickness tolerance ± 0.5 (our production standard)