


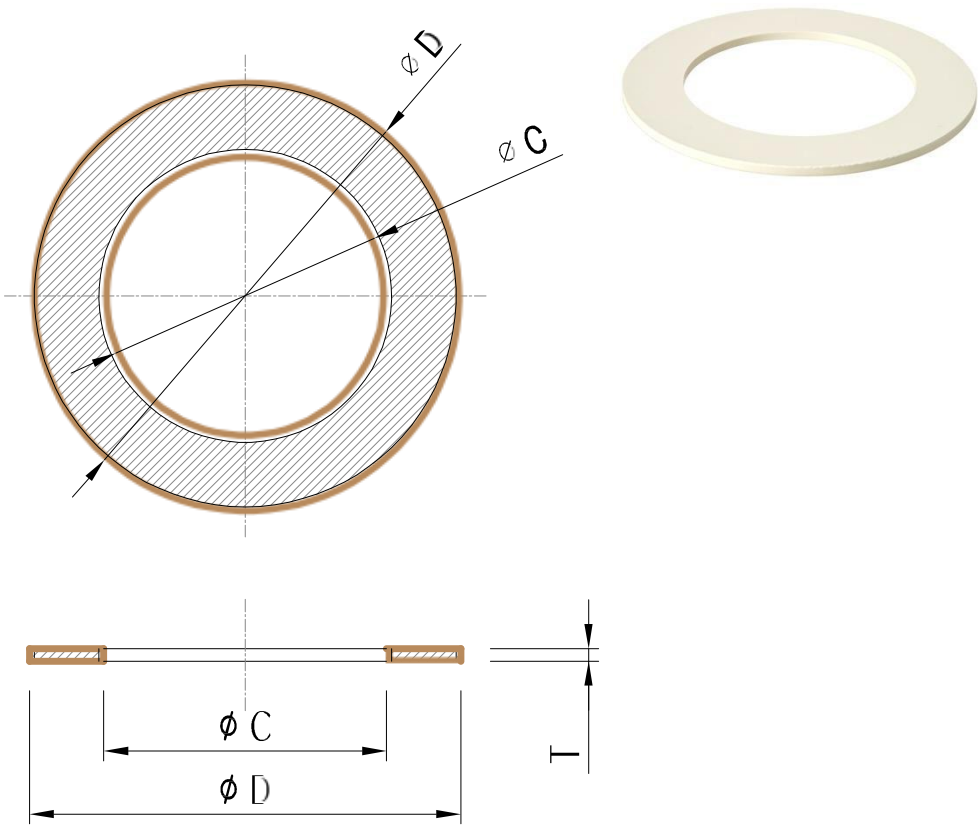

Nominal size	ϕC		ϕD		T
	Standard	Allowable error	Length	Allowable error	Thickness
50A	60.5	± 0.3	120.8	± 0.20	5
65A	76.4	± 0.3	137.0	± 0.30	5
75A	89.45	± 0.3	150.0	± 0.30	5
100A	114.55	± 0.35	175.0	± 0.40	5
125A	140.70	± 0.4	200.0	± 0.50	5
150A	165.85	± 0.45	226.0	± 0.50	5
200A	216.5	± 0.70	277.0	± 0.70	5
250A	267.5	± 0.90	328.0	± 0.90	5
300A	319.15	± 1.00	380.0	± 1.00	5

- Unit: mm
- Allowable error : KS M3410 application
- Thickness tolerance ± 0.5 (our production standard)