
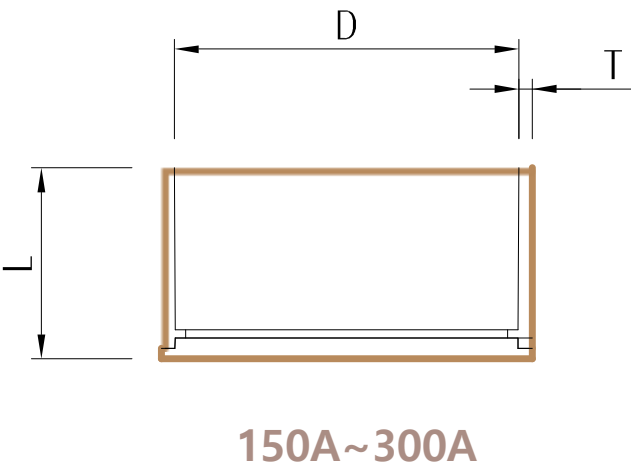
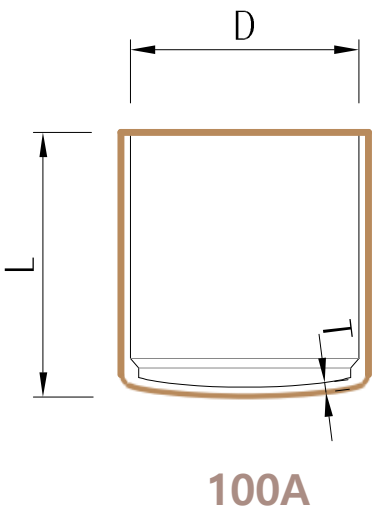


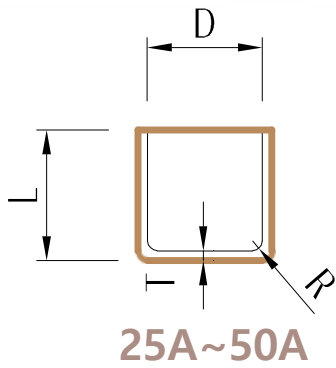

| Nominal size | Ø D(ID)       | L      |                 | T         |
|--------------|---------------|--------|-----------------|-----------|
|              | Standard      | Length | Allowable error | Thickness |
| 25A          | 32.5          | 44.5   | +5.0            | 4.0       |
| 30A          | 38.25         |        | +5.0            | 2.5       |
| 50A          | 60.35         | 69.0   | +5.0            | 5.0       |
| 75A          | 89.45         | 82.0   | +5.0            | 7.0       |
| 100A         | 114.55        | 101.0  | +5.0            | 8.0       |
| 125A         | 140.70        | 70.0   | +5.0            | 5.0       |
| 150A         | 165.85        | 86.0   | +5.0            | 6.0       |
| 200A         | 216.5         | 112.0  | +5.0            | 8.0       |
| 250A         | 267.5         | 149.0  | +5.0            | 8.0       |
| 300A         | *custom order |        |                 |           |

- Unit: mm
- Allowable error : KS M3410 application R should be 1mm or more
- Thickness tolerance ± 0.5 (our production standard)