





D100-450mm

SINGLE BLADE BLAST GATE

(Sizes in mm)

ORDERING INFORMATION

BD	1	C	0100	AF	0200	/	A0
Description (产品类型) BD: BLAST GATE (插板阀)							
Material (材质) 1: SS304 (不锈钢304) 2: SS304L (不锈钢304L) 3: SS316L (不锈钢316L)							
Coating Yes/No (是 / 否喷涂) C:ETFE Coated (ETFE 喷涂) S: Stainless Steel Uncoated (不锈钢不喷涂)							
Connection (连接形式) AF: Standard, SS304 Angle Ring, Tack Welded 标准不锈钢304角钢法兰,点焊固定 AN: SS304 Angle Ring, Not Tack Welded 不锈钢304角钢,活动法兰 PF: SS304 Flat Ring, Tack welded 不锈钢304平板法兰,点焊固定 PN: SS304 Flat Ring, Not Tack Welded 不锈钢304平板,活动法兰 XF: Customized Connection 定制法兰							
Diameter: D (直径) 100mm ≤ D ≤ 450mm eg. 0100: Diameter 100mm (直径100mm)				Length: L (长度) STD.L : (标准长度) 0°: 200mm for D0100-D0450 10°: 300mm for D0100-D0250 400mm for D0300-D0450 eg. 0200 : Length 200mm (长度200mm)			
Blade Angle (叶片角度) A0: 0° A1: 10°							

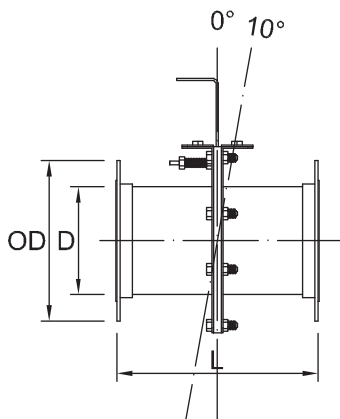

D100-450mm

SINGLE BLADE BLAST GATE

(Sizes in mm)

>>> SPECIFICATIONS

- ☐ Single Gate Plate
- ☐ PTFE Seal
- ☐ Range D100~D450
- ☐ Handle Operation

>>> OPTIONS

- ☐ Customized length
- ☐ Customized connection

STANDARD PRODUCT DIMENSIONS

PN	D (mm)	L (mm)		B (mm)	C (mm)	Blade t (mm)	W.T (mm)
		A0=0°	A0=10°				
BD1C0100AF0200/A0	100	200	200	153	175	2.0	1.5
BD1C0150AF0200/A0	150	200	200	203	225	2.0	1.5
BD1C0200AF0200/A0	200	200	200	253	275	2.0	1.5
BD1C0250AF0200/A0	250	200	200	303	325	2.0	1.5
BD1C0300AF0200/A0	300	200	300	353	375	2.5	1.5
BD1C0350AF0200/A0	350	200	300	450	500	2.5	1.5
BD1C0400AF0200/A0	400	200	300	500	550	2.5	1.5
BD1C0450AF0200/A0	450	200	300	550	600	2.5	1.5